

Shower trays STONE DELUXE

Mineral marble shower tray with anti-slip surface



UV Resistant



Slip Resistant



Stain Resistant



Easy to Clean and Maintain




International Fire-spread Compliant



Models:

Shower tray STONE DELUXE square

Shower tray STONE DELUXE rectangular

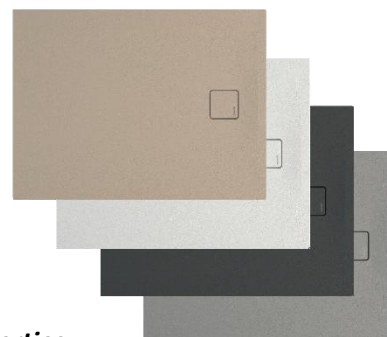

Technical information

Material	Model	Dimension [cm]	Weight [kg]	Dimension [cm]	Weight [kg]
mineral marble	square	80x80	23,5 kg	100x100	35,5 kg
		90x90	29,0 kg		35,5 kg
	rectangular	90x70	30,0 kg	180x80	64,7 kg
		100x70	32,7 kg	100x90	40,0 kg
		120x70	39,0 kg	120x90	48,4 kg
		140x70	45,8 kg	140x90	56,8 kg
		170x70	55,2 kg	160x90	63,7 kg
		100x80	37,0 kg	170x90	68,3 kg
		120x80	43,7 kg	180x90	71,5 kg
		140x80	51,0 kg	120x100	53,7 kg
		160x80	57,9 kg	140x100	62,7 kg
170x80	61,5 kg	160x100	71,6 kg		
Remark:	<ul style="list-style-type: none"> - drainage hole \varnothing90 - depth 1,5 cm - available in colors: white, beige, cement, black 				

Declared properties


Tested properties	Requirement according to the European Standard	Confirmed level
- cleanability	EN 14527:2016 +A1:2018 – 6.2.1	Pass
- drainage of water	EN 14527:2016 +A1:2018 – 6.2.2	
- durability	EN 14527:2016 +A1:2018 – 6.3	Class 2
- slip resistance	DIN 51097 (92)	A+B+C

Analysis of possible risks according to EU Regulation 2023/988

Material	Recognized risk	Risk elimination or reducing process	Tests conducted	Relevant EU norm
Mineral marble	Fulfilling the requirements of the Norm	Testing the product according to the requirements of the relevant standards.	Aquaestil Plus Laboratory test report No. TTK-260210 from 10.02.2026.	HRN EN 14527:2016 +A1:2018
	Hygiene and health risk	According to its composition, the product is intended for household use, but not for water consumption. Potential Health Effects Additives in this product do not present a respiration hazard unless the product is ground to a powder of respirable size and the dust is inhaled.	TDS from material supplier Moist-heat resistance – no faults at 100°C	EN 12721:1997
	Slipperiness of the surface	When getting in and out of the bathtub, hold on to a solid object or a handrail near the bathtub. Finishing the roughness of the surface by grinding or anti-slip coating.	Centro Di Ricerca e Sperimentazione Per L' Industria Ceramica Rapporto Di Prova N° 3703/17 from 27.03.2017. Resistenza allo scivolamento	DIN 51097 (92)
	Flammability	Do not leave smoldering or hot objects on the products as they may damage the surface. The surface material can be combusted only with difficulty.	TDS from material supplier Dry-heat resistance - no faults at 160°C	EN 12722:1997



Technical drawing according to the model:

STONE DELUXE SQUARE

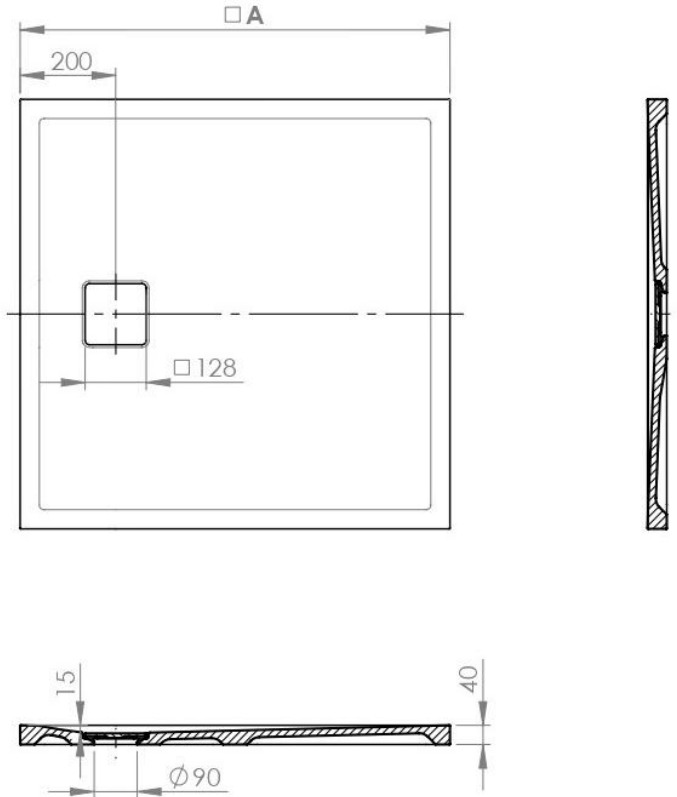



MODEL	A /mm/
80 x 80	800
90 x 90	900
100 x 100	1000

STONE DELUXE RECTANGULAR – lateral outflow

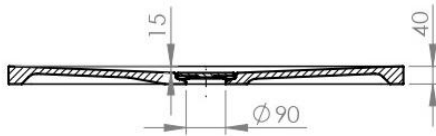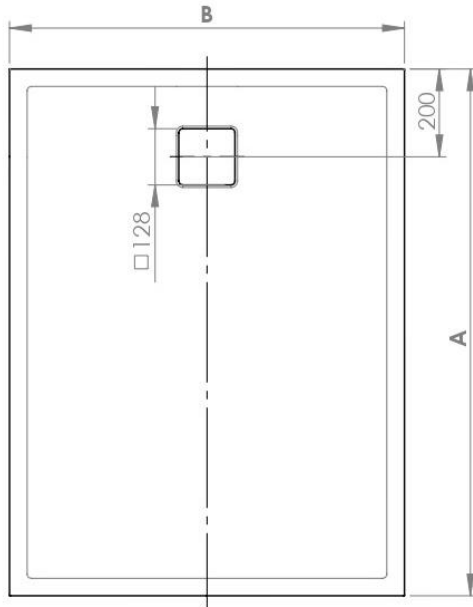

MODEL	A (mm)	B (mm)
90x70	900	700
100x70	1000	700
100x80	1000	800
100x90	1000	900
120x70	1200	700
120x80	1200	800
120x90	1200	900
120x100	1200	1000
140x70	1400	700
140x80	1400	800
140x90	1400	900
140x100	1400	1000
160x80	1600	800
160x90	1600	900
160x100	1600	1000

STONE DELUXE PRAVOKUTNA – central outflow

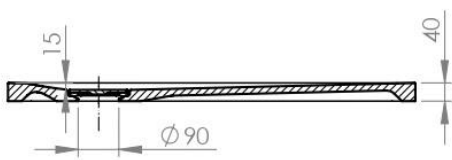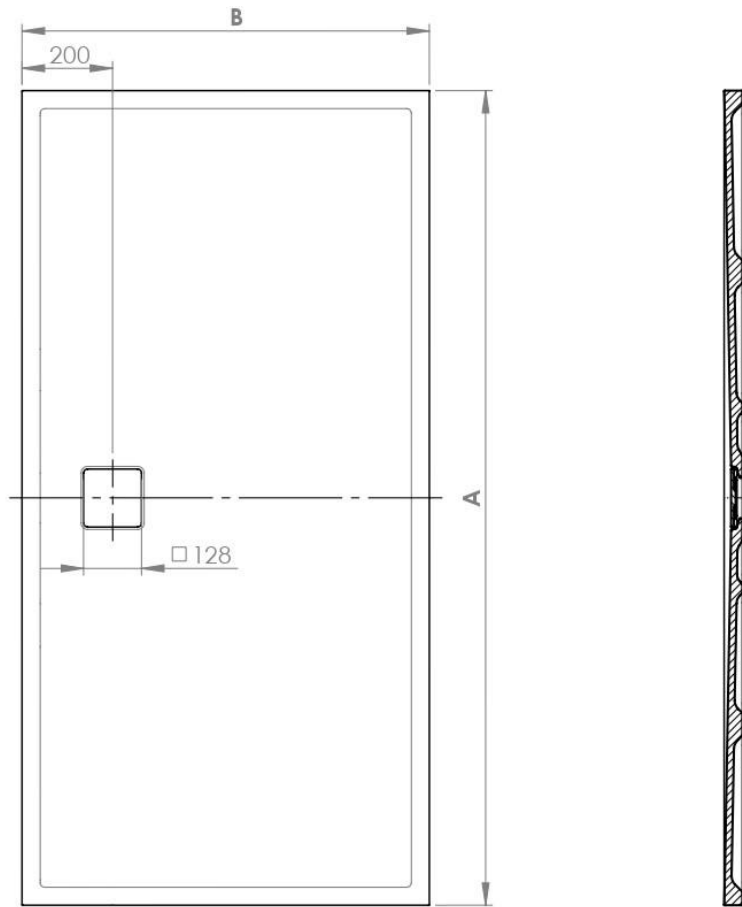

MODEL	A /mm/	B /mm/
170 x 70	1700	700
170 x 80	1700	800
170 x 90	1700	900
180 x 80	1800	800
180 x 90	1800	900